

COB41232B1X

4MP Mini-Bullet Camera

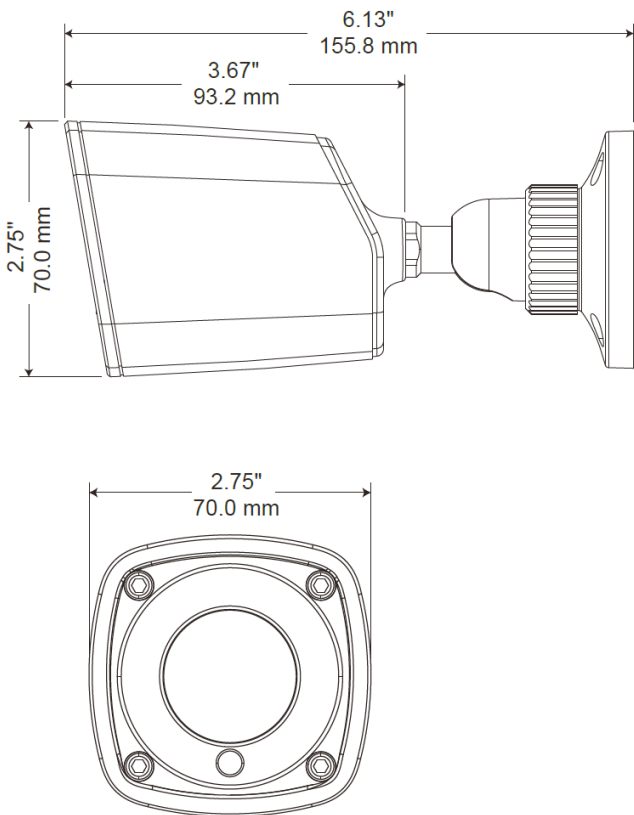
VISION



Features

- 4MP (2592x1520) H.265 coding
- Max. resolution: 2592x1520
- ICR auto switch, true day night
- 10~20m IR night view distance
- 3D DNR, digital WDR
- Support smart alarm such as video exception, line crossing, intrusion, etc.
- ROI coding
- Supports PoE power supply
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection
- Supports three streams

SPECIFICATIONS

CAMERA		FUNCTIONS	
Image Sensor	1/3" CMOS	Remote Monitoring	Web browsing, VMS remote control
Image Size	4MP (2592x1520)	Online Connection	Supports simultaneous monitoring for up to 10 users; supports multi-stream real-time transmission
Electronic Shutter	1/25 s~1/100000s	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Iris Type	Fixed Iris	Interface Protocol	ONVIF
Min. Illumination	0.05 lux@F1.2, AGC ON; 0 lux with IR	Storage	Network remote storage
Lens	M12 2.8 mm@F1.6	Smart Alarm	Motion detection
Wide Dynamic Range	120dB	MISCELLANEOUS	
Day & Night	ICR	Power Supply	DC12V/PoE
Digital NR	2D/3D DNR	Power Consumption	< 6.5W
Angle Adjustment	Any angle	IR Distance	33~66 ft (10~20 m)
IMAGE		Ingress Protection	IP66
Video Compression	H.265 / H.264 / MJPEG	Environment	-4°F~122°F (-20°C~50°C), 10%~90% relative humidity
H.264 Compression Standard	Main Profile @ Level 4.1 High Tier	Dimensions	Ø2.8"~6.1"(Ø70 x 156mm)
Resolution	4MP (2592 x 1520), 2K (2560 x 1440), 3MP (2304 x 1296), 3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240	Weight (net)	0.82 lbs (370g)
Main Stream	4MP (1~20fps)/2K (1~20fps)/3MP (1~30fps)/1080P (1~30fps)/720P (1~30fps)	ORDERING INFORMATION	
Bit Rate	128Kbps ~ 8Mbps	COB41232B1X	4Mp Network Mini Bullet Camera
Bit Rate Type	VBR/CBR		
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, Anti-flicker, etc. adjustable through client software or web browser		
ROI	3 - Each ROI can be configured separately		
INTERFACES			
Network	RJ45		
Video Output	NO		
Audio	NO		
Storage	Network remote storage		

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.