

BHR22B0SWEK

Single-gang Metal Keypad 125KHz Reader

SECURITY




Features

- Tamper-Resistant Metal Waterproof Keypad Reader
- 125KHz Support for PMTronics cards and fobs
- Support for 3rd-party cards, testing may be required.
- Operating temperature - 40° F - 140° F (- 40° C-60° C)
- Designed for single-gang installation. Dimensions: 5" x 3.2" x 1.1" (128mm x 82mm x 28mm)
- Backlit keypad
- Fully Potted, IP65
- IK10 Impact rating

SPECIFICATIONS

| ENVIRONMENTAL | | MISCELLANEOUS | |
|----------------------------|---|----------------------|-----------------------------------|
| Working Environment | Designed to work in an indoor /outdoor environment. | Keypad | 12-Key Numeric, backlit |
| Temperature | -40°F~-140°F / -40°C~60°C | Indicators | Tri-color LED, Piezo Buzzer |
| Operating Humidity | 0~95% | Pigtail | 18" 12-Conductor, stranded tinned |
| POWER | | ORDERING INFORMATION | |
| Input Voltage | 12 V DC to 24 V DC, polarity Sensitive | BHR22B0SWEK | WHK-Wiegand Hardened Keypad |
| Power Requirements @12 VDC | <100mA / <2W | | |
| READER FUNCTION | | | |
| Frequency | 125kHz EM (All PMTronics Cards and Fobs) | | |
| Modes | Tag, Personal Access Code | | |
| Protocol | Default 40-bit Wiegand (programmable) | | |
| Read Range | Up to 2" / 500mm | | |
| ENCLOSURE | | | |
| Dimensions | (W x H x D) 3.22" x 5.03" x 1.10" | | |
| Weight | 1.43 lbs. / 652 g | | |
| Material | Zinc alloy | | |
| Mounting | Single-Gang | | |

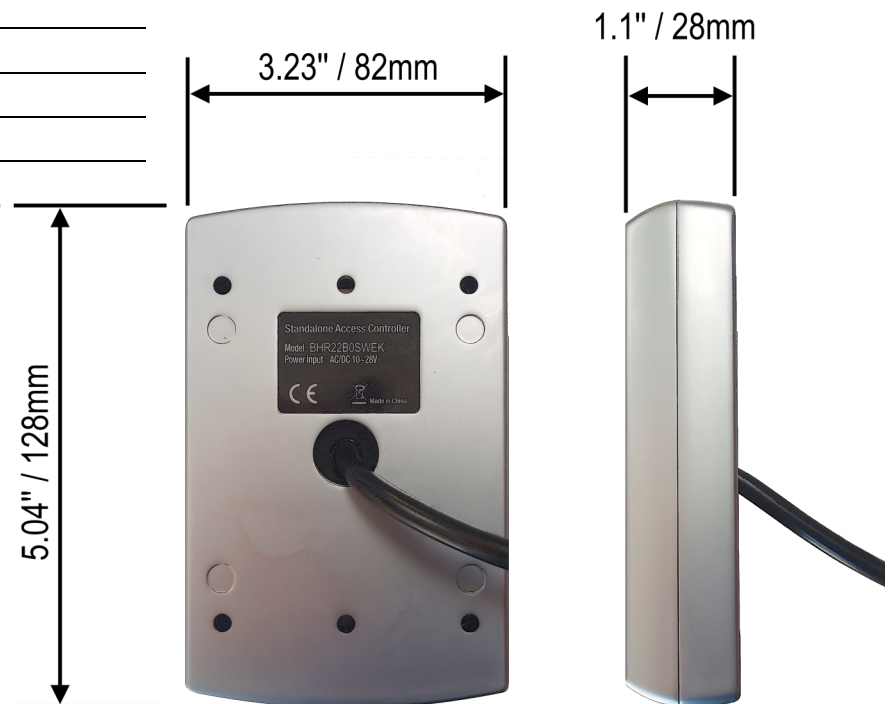

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.