

COD512CRB12

5MP Motorized Network IR Dome

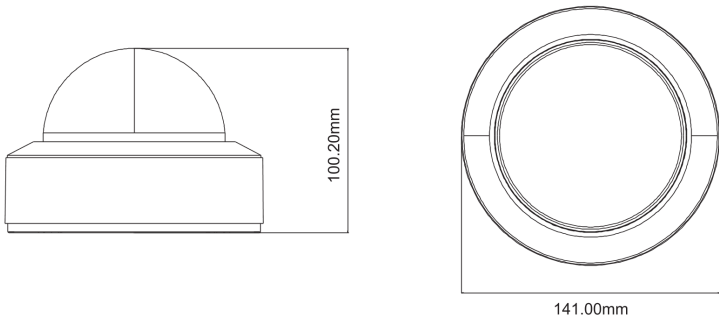
VISION



Features

- 5MP (2592 x 1944) H.265 coding
- Resolution:2592 1944
- ICR auto switch, true day/night
- 30~50m IR night view distance
- 3D DNR, true WDR, HLC, BLC, Defog, Smart IR and ROI coding
- DC12V/PoE power supply
- IP67 & IK10
- Three streams
- Built-in micro SD card slot, up to 128GB
- Intelligent analytics

SPECIFICATIONS

CAMERA		FUNCTIONS	
Image Sensor	1/2.7 "CMOS	Remote Monitoring	Web browsing, VMS remote control
Image Size	2592×1944	Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Electronic Shutter	1/25s ~ 1/100000s	Network Protocol	UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Iris Type	Fixed Iris	Interface Protocol	ONVIF
Min. Illumination	0.0115 lux @F1.4, AGC ON; 0 lux with IR 0.0085 lux @ F1.2, AGC ON; 0 lux with IR	Storage	Network remote storage; micro SD card storage
Lens	2.8 ~ 12 mm @F1.4; (motorized)	Smart Alarm	Motion detection
Wide Dynamic Range	Digital WDR	Intelligent Analytics	Object removal detection, abnormal video signal detection, intrusion detection and line crossing detection
BLC/HLC	Yes	MISCELLANEOUS	
Defog	Yes	Power Supply	DC12V/PoE
Digital NR	3D DNR	Power Consumption	< 10W
Angle Adjustment	Pan: 0 ~345 ; Tilt: ° 0°~77°; Rotation: 0°~345°	IR Distance	30 ~ 50 m
IMAGE		Ingress Protection	IP67 &IK10
Video Compression	H.265 / H.264	Operating Environment	- 30°C ~ 60°C (-22°F~140°F)Humidity: less than 95 % (non-condensing)
H.264 Compression Standard	Main Profile@Leve4.1 High Tier	Dimensions	Ø 141 × 100.2
Resolution	5MP (2592 × 1944), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	Weight (net)	Approx. 0.85KG
Main Stream	60Hz : 5MP(1 20fps)/4MP(1~30fps)/1080P (1~30fps)/720P(1~30fps)	ORDERING INFORMATION	
Sub Stream	60Hz : 720P /D1 /CIF (1~30fps)	COD4121RB1X	4MP Network IR Dome Camera
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/ CIF/480x240 (1~25fps)	ACCESSORIES	
Bit Rate	64 Kbps ~ 5 Mbps	B10-W	Junction box
Bit Rate Type	VBR/CBR	B10-W+BRACKET12-W	Wall Mount Kit (Both units required for wall mounting)
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser		
ROI	Each ROI to be configured separately		
INTERFACES			
Network	RJ45		
Analog Video Output	None		
Audio	None		
Storage	Built-in micro SD card slot; up to 128GB		

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.