

COE212CRB1X

2MP Starlight IR Turret

VISION




Features

- 2MP (1920 × 1080) H.265 full real time coding
- Max. resolution: 1920 × 1080; ICR auto switch, true day / night
- 30- 50m IR night view distance
- Motorized lens
- 3D DNR, Digital WDR, HLC, BLC and Defog
- Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- IP67 ingress protection
- Dual stream
- Intelligent Analytics: video blur detection, line crossing detection, intrusion detection
- Starlight

SPECIFICATIONS

CAMERA		FUNCTIONS	
Image Sensor	1 / 2.8 "CMOS	Remote Monitoring	Web browser, CMS remote control
Image Size	1920 × 1080	Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Iris Type	Fixed Iris	Interface Protocol	ONVIF
Min. Illumination	0.007 lux@F2.0,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR	Storage	Network remote storage; micro SD card storage
Lens	2.8~12mm @F1.4,H.FoV: 91°~37.5°; V.FoV:51° ~20.5°; D.FoV:96°~42.0°	Intelligent Analytics	Video blur detection, intrusion detection and line crossing detection
Wide Dynamic Range	Digital WDR	Smart Alarm	Motion detection, SD card error, SD card full
BLC/HLC	Yes	General	Watermark, IP address filtering, video mask, heart- beat, password protection
Defog	Yes		
Digital NR	3D DNR		
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°; Rotation: 0°~360°		
IMAGE		MISCELLANEOUS	
Video Compression	H.265 / H.264 / MJPEG	Power Supply	DC12V/PoE
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	Power Consumption	< 9.W
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	IR Distance	30 ~ 50 m / (98Ft-164Ft)
Main Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps)	Ingress Protection	IP67
Sub Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/ CIF/480x240 (1~25fps)	Operating Environment	- 30 °C 60 (-22°F~140°F) Humidity: less than 95 % non condensing
Bit Rate	128 Kbps ~ 6 Mbps	Dimensions (mm)	Ø 111.5 x 99.6
Bit Rate Type	VBR / CBR	Weight (net)	Approx. 0.66KG
Audio Compression	G711A / U	ORDERING INFORMATION	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser	COD212BRB1X	2MP Starlight Network IR Turret Camera
ROI	Each ROI to be configured separately	ACCESSORIES	
INTERFACES		B9-W	Junction box
Network	RJ45	BRACKET11-W	Wall-mount bracket
Video Output	NO		
Audio	1CH built-in MIC		
Storage	Built-in micro SD card slot; up to 128GB		
Hardware Reset	Yes		

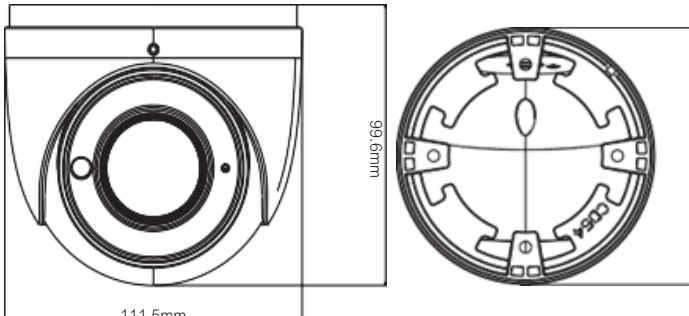

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.