

COE31213B1X

3MP Network IR Mini Turret

VISION



Features

- 3MP (2048 x 1536) full real-time coding
- Maximum resolution: 2048 x 1536
- ICR auto switch, true day/night
- 10~20m IR night view distance
- 3D DNR, digital WDR
- PoE power supply
- Smart phone, tablet, remote monitoring
- IP66 ingress protection

SPECIFICATIONS

CAMERA

Image Sensor	1/3 "CMOS
Image Size	1920 x 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.1 lux @F1.2, AGC ON; 0 lux with IR
Lens	3.6 mm @ F1.6, angle of view: 79°
Wide Dynamic Range	Digital WDR
Digital NR	3D DNR
Angle Adjustment	Any Angle

IMAGE

Video Compression	H.265 / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Main Stream	60Hz: 1080P (1~30fps) / 720P (1~30fps)
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR; adjustable through client software or web-browser
ROI	3

INTERFACES

Network	RJ45
Analog Output	NO
Audio	NO
Storage	Network remote storage

ORDERING INFORMATION


COE31213B1X	3Mp Network turret Camera
AW03W10	Wall Mount Bracket
AJB2W10	Junction Box
AAB2W12	Gang Plate

FUNCTIONS

Remote Monitoring	Web browser, VMS
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP
Interface Protocol	ONVIF
Storage	Network remote storage
Smart Alarm	Motion detection

MISCELLANEOUS

Power Supply	DC12V/PoE
Power Consumption	< 4.5W
IR Distance	10 ~ 20 m
Ingress Protection	IP66
Weight (net)	0.95lb (428g)

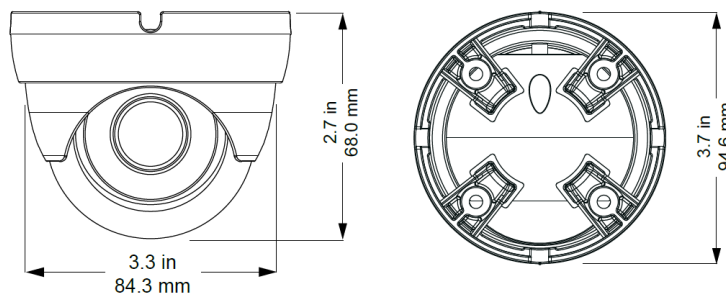

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.