

COE412C2BA1

4MP Network IR Turret

VISION




Features

- 4MP (2560 × 1440) H.265 coding
- Max.resolution: 2560 × 1440
- ICR auto switch, true day/night
- 20 – 30m IR night view distance
- 2.8 mm Fixed lens
- 3D DNR, Digital WDR, HLC, BLC and Defog
- DC12V/PoE power supply
- IP67 ingress protection
- Three streams
- Intelligent analytics

SPECIFICATIONS

CAMERA		FUNCTIONS	
Image Sensor	1 / 2.7 "CMOS	Remote Monitoring	Web browser, CMS remote control
Image Size	2560×1440	Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Iris Type	Fixed Iris	Interface Protocol	ONVIF, GB-T/28181-2011
Min. Illumination	0.011 lux @F1.2, AGC ON; 0 lux with IR 0.04 lux @ F2.26, AGC ON; 0 lux with IR	Storage	Network remote storage
Lens	2.8 mm @F2.0, horizontal field of view: 110°	Intelligent Analytics	Region intrusion detection, object removal detection, abnormal video detection and line crossing detection (optional)
Wide Dynamic Range	Digital WDR	Smart Alarm	Motion detection
BLC/HLC	Yes	General function	Watermark, IP address filtering, video mask, heart- beat, password protection
Defog	Yes	MISCELLANEOUS	
Digital NR	3D DNR	Power Supply	DC12V/PoE
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°	Power Consumption	< 5.5W
IMAGE		IR Distance	20 ~ 30 m
Video Compression	H.265 / H.264	Ingress Protection	IP67
H.264 Compression Standard	Main Profile@Leve4.1 High Tier	Operating Environment	- 30 °C 60 (-22°F~140°F) Humidity: less than 95 % non condensing
Resolution	4MP (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	Dimensions (mm)	Ø 94.6 x 82.8
Main Stream	60Hz : 4MP/3MP/1080P(1~30fps)	Weight (net)	Approx. 0.45KG
Sub Stream	60Hz : 720P(1~15fps)/D1(1~30fps)/CIF (1~30fps)	ORDERING INFORMATION	
Bit Rate	64 Kbps ~ 5 Mbps	COE412C2BA1	4MP Network IR Turret
Bit Rate Type	VBR / CBR	ACCESSORIES	
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser	B8-W	Junction Box
ROI	Each ROI to be configured separately	BRACKET11-W	Wall Mount Bracket
INTERFACES			
Network	RJ45		
Video Output	NO		
Audio	1CH built-in MIC		
Storage	Not Supported		

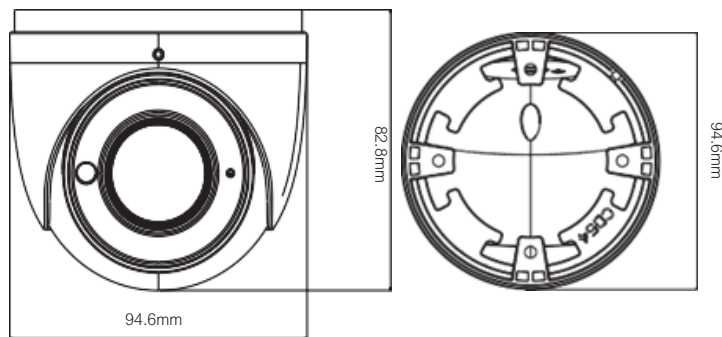

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.