

COF62211B1X

6MP Fisheye Camera

VISION




Features

- 6MP H.265 full real time coding
- Effective pixels: 2160 × 2160
- 1CH audio input, 1CH audio output, 1CH built-in MIC
- 3D DNR, digital WDR, HLC, BLC, defog
- ICR auto switch, true day / night
- Built-in micro SD card slot, up to 128GB
- 20 ~ 30m IR night view distance
- DC12V/PoE power supply
- IP67 Ingress protection

SPECIFICATIONS

CAMERA		FUNCTIONS	
Image Sensor	1 / 2.9 "6MP progressive scan CMOS	Remote Monitoring	Web browsing, CMS remote control
Image Size	2160 x 2160	Online Connection	Support simultaneous monitoring for up to 11 users; Support multi-stream real time transmission
Electronic Shutter	1 / 25 s ~ 1 / 100000 s	Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, UPnP
Iris Type	Fixed Iris	Interface Protocol	ONVIF, GB-T/28181-2011
Min. Illumination	0.068lux@F2.0, AGC ON; 0 lux with IR	Storage	Network remote storage; micro SD card storage
Lens	1.07mm @F2.5, horizontal field of view : 180° (wall mounting), 360° (wall mounting)	Smart Alarm	Motion detection; Sensor alarm
Wide Dynamic Range	Digital WDR	General	Watermark, IP address filtering, video mask
BLC/HLC	Yes	MISCELLANEOUS	
Defog	Yes	Power Supply	DC12V/PoE
Digital NR	3D DNR	Power Consumption	< 5W
Slow Shutter	Yes	IR Distance	20 ~ 30 m
IMAGE		Ingress Protection	IP67
Video Compression	H.265 / H.264 / MJPEG	Operating Environment	- 30 °C ~ 60 (-22°F~140°F) Humidity: less than 95 % °C (non-condensing)
H.264 Compression Standard	Main Profile@Leve4.1 High Tier	Weight	Approx. 1lbs (0.45KG)
Max. Image Size	2160 x 2160	ORDERING INFORMATION	
Main Stream	1. Fisheye+panorama+3 PTZ 60Hz: 30fps@(2160 × 2160/1920 × 1920/1440 × 1440), 30fps@(1920 × 1080), 30fps@(960 × 540)	COF62211B1X	5MP IR Fixed 2.8mm IP Bullet Camera
	2. Fisheye+ 4 PTZ 60Hz: 30fps@(2160 × 2160/1920 × 1920/1440 × 1440), 30fps@(960 × 540)	ACCESSORIES	
Bit Rate	128 Kbps ~ 16 Mbps	B12-W	Junction Box
Bit Rate Type	VBR / CBR		
Audio Compression	G711A / U		
Smart Encoding	Support low bitrate, low delay; support ROI coding & SVC technology; support self-adaptative transmission bitrate as the network environment		
ROI	Each ROI to be configured separately		
INTERFACES			
Network	RJ45		
Video Output	CVBS output (BNC × 1)		
Audio	1CH audio input; 1CH audio output; 1CH built-in MIC		
Alarm	1CH alarm input; 1CH alarm output		
Storage	Built-in micro SD card slot; up to 128GB		

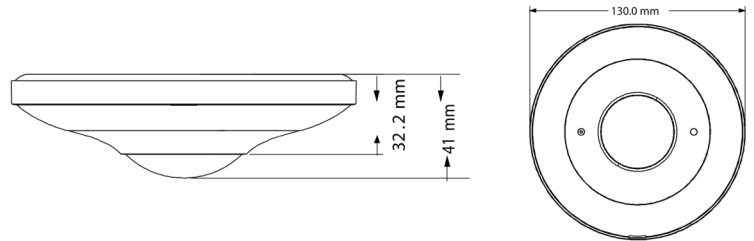

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT team at 727-786-1900.