

COS3134RB1X

3MP Outdoor IR HD PTZ Camera

VISION




Features

- 3MP H.265 full real time coding
- HD network video output: 2048 x 1536 @25/30fps
- 20X optical zoom
- SD card local storage, network remote storage
- Support selected area amplification and PTZ function
- Built-in micro SD card slot, up to 128GB
- IR night view distance: 100m
- TCP / IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE
- IP66 ingress protection
- Surge protection

SPECIFICATIONS

CAMERA		PTZ	
Image Sensor	1/28 " Progressive CMOS	Pan Range	360° endless rotation
Image Size	2048 x 1536 (3MP)	Pan Speed	Preset speed: 240°/s Manual control speed: 0.5 ~ 90 °/s
Min. Illumination	0 Lux	Tilt Range	0 ~ 93° (auto rotation)
Lens	20x Zoom, f = 5.5 ~ 110 mm, F1.6 ~ F3.5	Tilt Speed	Preset speed: 160°/s Manual control speed: 0.5 ~ 90 °/s
Focal Length	5.5 ~ 110 mm	Preset	255
White Balance	Auto/Manual	Track	4
S/N Ratio	Max 48dB	Scan	2
Day/Light	Auto/Manual	Home Position	Yes
Focus Mode	Auto/Manual	Auto Flip	Yes
Wide Dynamic Range	Digital WDR	Alarm Input/Output	1/1
IMAGE		ORDERING INFORMATION	
Video Compression	H.265/H.264/MJPEG	COS3134RB1X	3MP Outdoor IR HD PTZ Camera 20X Zoom - Wall-mount bracket and power supply included.
Resolution	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240		
INTERFACES			
Network	10 Base-T/100 Base-TX, RJ45		
Network Protocol	TCP/IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP, FTP, PPPoE		
Interface Protocol	ONVIF		
Audio	MIC input x 1, MIC output x 1		
Audio Compression	G.711A/G.711U		
Storage	SD card local storage, network remote storage		
Smart Alarm	Motion Alarm, Sensor Alarm		
MISCELLANEOUS			
Power Supply	AC 24V/3000 mA		
Power Consumption	15 W max 30W, IR on		
Working Environment	Temperature: -20°C~60°C Humidity: less than 95%)		
IR Distance	100m (330')		
Ingress Protection	IP66		
Lightning Protection	TVS 6KV lightning protection, surge protection		
Remote Monitoring	Web browser, VMS		
Dimensions	8.2" x 1.04" (Ø 209 x 317mm)		
Weight	7.7Lbs (3.5Kg)		

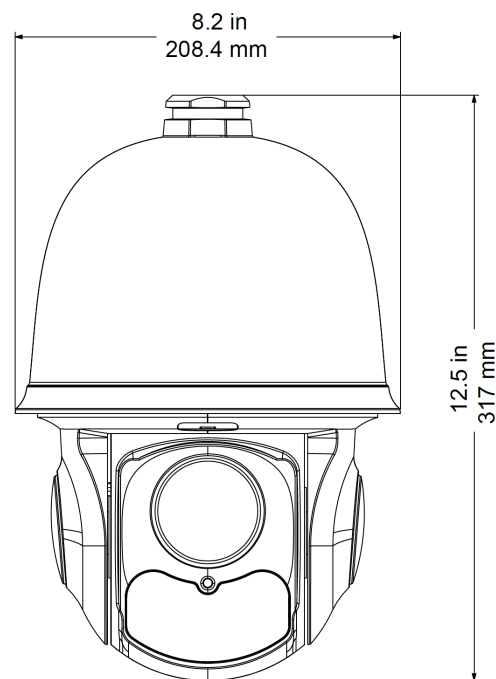

Make the Intelligent Choice

For more information about PM Tronics Security products, to see demonstrations, or to discuss your company's needs contact the PMT Security team at 727-786-1900.