


12MP Fisheye Camera

COFB1211B1X

VISION

Features

- 12MP H.265 full real time coding
- H.265+ / H.265/ H.264+ / H.264 MJPEG
- ICR auto switch, true day & night
- Support 3D DNR, digital WDR, BLC, HLC
- Support ROI
- Built-in micro SD card slot, up to 256GB.
- IP 67 ingress protection.
- Intelligent Analytics

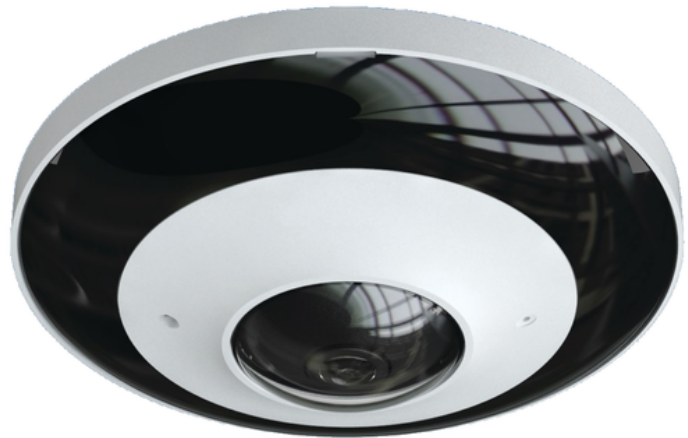

Specifications

Camera	
Image Sensor	1/1.7 Progressive Scan CMOS
Image Size	4000×3000
Min. Illumination	0.01 lux@F2.0, AGC ON; 0 lux with IR
Electronic Shutter	1/3s ~ 1/100000s
Iris Type	Fixed Iris
Lens	1.65mm @F2.0
Wide Dynamic Range	Digital WDR
BLC/HLC	Yes
Defog	Yes
Digital NR	3D NR
S/N Ratio	1.65mm @F2.0


Image	
Video Compression	H.265+/H.265/H.264+/H.264/MJPEG
Bit Rate Type	VBR / CBR
Bit Rate	128Kbps~16Mbps
Audio Compression	G711A / U
ROI	Each ROI to be configured separately

Interfaces	
Network	RJ45 10/100M Ethernet
Video Output	CVBS (BNC×1)
Audio	2CH MIC, 1CH audio input, 1CH audio output
RS-485	Yes
Alarm	1CH input, 1CH output
Storage	Micro SD up to 256GB

Network	
Remote Monitoring	Web Browser/NVMS2.0/NVR/mobile APP
PoE	IEEE802.3af
Interface Protocol	ONVIF

Miscellaneous	
Power Supply	DC12V/PoE
Power Consumption	<10.5W
IR Distance	10-20m
Ingress Protection	IP67
Operating Environment	-30C to 60C, humidity <=95%
Installation	Wall, ceiling, desktop
Certificate	CE, FCC, UKCA
Weight (net)	Approx. 516.2g

Ordering Information	
COFB1211B1X	12MP Fisheye Camera

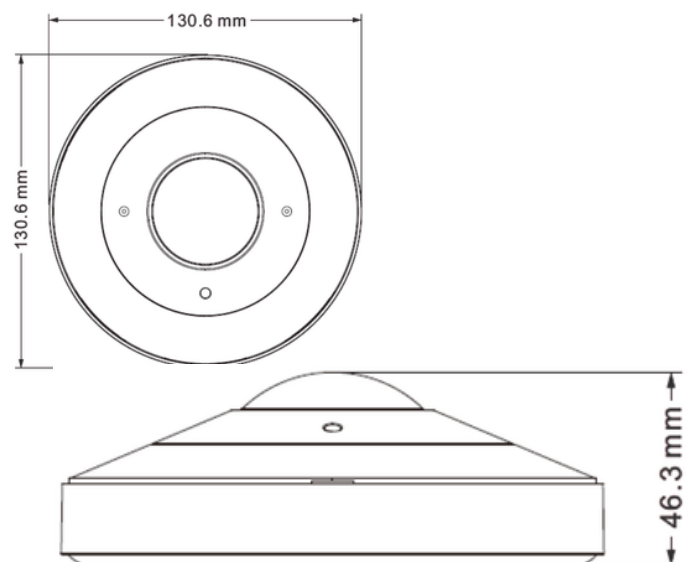

Make the Intelligent Choice

For more information about PMT Security products, view demonstrations, or to discuss your company's needs contact the PMT Security team at **727-786-1900**.