5MP Motorized IP Bullet Camera

COB512C2B1X

VISION

Features

- 5MP (2592 × 1944) H.265 coding
- Max. resolution: 2592 x 1994
- Motorized zoom
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- DC12V/PoE power supply
- IP67 Ingress protection
- Three streams
- Intelligent analytics



Specifications

Camera	
Image Sensor	1 / 2.7" CMOS
Image Size	2592 × 1944
Min. Illumination	0.0236 lux @F2.0, AGC ON; 0 lux with IR 0.0085 lux @ F1.2, AGC ON; 0 lux with IR
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Lens	2.8~12mm @F1.4, Horizontal field of view: 90.5°~32.9°
Wide Dynamic Range	Digital WDR
BLC/HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°

Image	
Resolution	5MP (2592 × 1944), 4MP (2560 × 1440), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Video Compression	H.265 / H.264
Main Stream	60Hz : 5MP(1~20fps)/4MP(1~30fps)/ 1080P(1~30fps)/720P(1~30fps)
Sub Stream	60Hz :720P (1~15fps)/D1 (1~30fps)/CIF (1~30fps)
Third Stream	60Hz : D1/CIF/480x240 (1~30fps)
Bit Rate Type	VBR / CBR
Bit Rate	64 Kbps ~ 5 Mbps
Audio Compression	N/A
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately

Interfaces	
Network	RJ45
Video Output	No Analog
Audio	None
Alarm	None
Storage	None

Network	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	Network remote storage
Smart Alarm	Motion detection
Intelligent Analytics Detection	Object removal detection, abnormal video signal detection, intrusion detection and line crossing detection
General	Watermark, IP address filtering, video mask, heartbeat, password protection

Miscellaneous	
Power Supply	DC12V/PoE
Power Comsumption	<9W
IR Distance	30 ~ 50 m
Ingress Protection	IP67
Operating Environment	- 30 °C ~ 60 (-22°F~140°F) Humidity: less than 95 % °C (non-condensing)
Weight	Approx. 1.4lbs (0.65kg)

Ordering Information	
COB512CRB1X	5MP IR Motorized IP Bullet Camera

Accessories	
B8-W	Junction Box

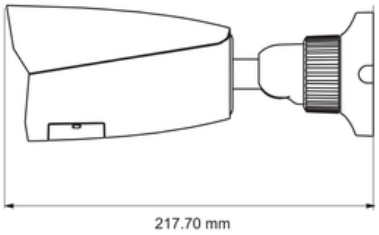



Make the Intelligent Choice

For more information about PMT Security products, view demonstrations, or to discuss your company's needs contact the PMT Security team at **727-786-1900.**

pmtsecurity.com